


Technical Details

- | | |
|---------------------------|-----------------------------------|
| Available Bore Sizes | Ø 40 / Ø 50 / Ø 63 / Ø 80 / Ø 100 |
| Maximum Working Pressure | 240 bar |
| Hydraulic Oil | Mineral Oil (HL / HLP) |
| Materials of Construction | CDS Tube Grade ST52 / C45 / En8 |
| Temperature Range | -10 to +90°C |

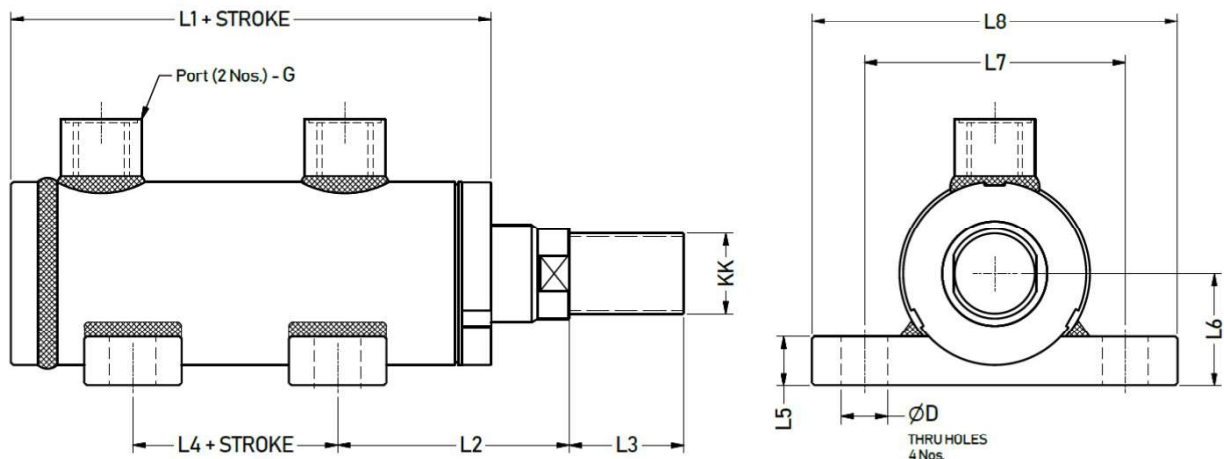

BORE DIA.	ROD DIA.	L1	L2	L3	L4	L5	L6	L7	L8	KK	D	G (BSP)	Max. Load Carrying Capacity (metric ton)		Genuine Seal Kit Part No.
													Push	Pull	
40	25	133	81	24	36	20	35	72	100	M20 x 1.5	13	3/8"	3.0	1.8	RX1601-Z
50	30	137	82	24	34	20	40	90	120	M24 x 2.0	13	1/2"	4.7	3.0	RX1602-Z
63	40	147	95	47	34	20	46	109	150	M33 x 2.0	17	1/2"	7.5	4.5	RX1603-Z
80	45	153	99	47	36	25	58	123	164	M33 x 2.0	17	1/2"	12.1	8.2	RX1604-Z
100	56	172	114	58	39	25	68	145	190	M42 x 2.0	21	3/4"	18.9	13.0	RX1605-Z

* *Single Acting Option available.*

Example: For a cylinder of Bore Ø 63mm & Stroke 900 mm the order code shall be : **RW7-063-0900**