


4 Self Aligning Clevis - Short :

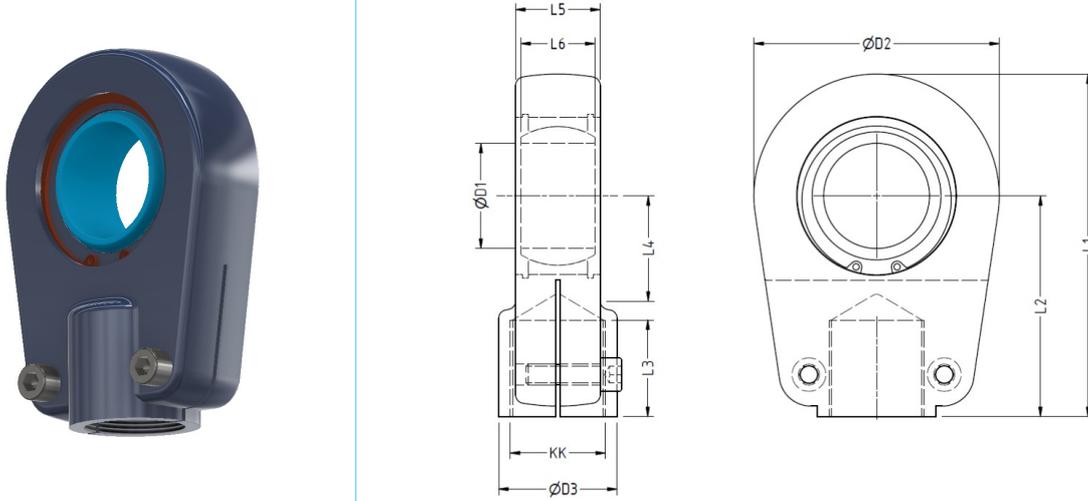

Installation Dimensions & Specifications :

PART NUMBER	DIMENSIONS										LOAD RATING (kN)		WEIGHT (kg)
	D1	D2	D3	KK (6H)	L1	L2	L3	L4	L5	L6	Dynamic	Static	
RXSR20	20	56	25	M16X1.5	80	50	17	25	19	16	30	81	0.44
RXSR25	25	56	25	M16X1.5	80	50	17	25	23	20	48	72	0.47
RXSR30	30	64	32	M22X1.5	94	60	23	30	28	22	62	106	0.77
RXSR35	35	78	40	M28X1.5	112	70	29	38	30	25	79	153	1.24
RXSR40	40	94	49	M35X1.5	135	85	36	45	35	28	99	250	2.12
RXSR50	50	116	61	M45X1.5	168	105	45	55	40	35	156	365	3.74
RXSR60	60	130	75	M58X1.5	200	130	59	65	50	44	245	400	6.49
RXSR70	70	154	86	M65X1.5	232	150	66	75	55	49	313	540	9.88
RXSR80	80	176	105	M80X2	265	170	81	80	60	55	400	670	14.2
RXSR90	90	206	124	M100X2	323	210	101	90	65	60	488	980	23.5
RXSR100	100	231	138	M110X2	360	235	111	105	70	70	607	1120	32.14
RXSR110	110	266	152	M120X3	407	265	125	115	80	70	654	1700	47.6
RXSR120	120	340	172	M130X3	490	310	135	140	90	85	950	2900	72

All dimensions are in mm .

NOTE: For Left Hand thread, add suffix – “L” to Part Number. Example: RXLR110-L